

Marine Propulsion Engine Range


Model	Maximum power		Capacity	Cylinders	Aspiration	Bore	Stroke	*Overall dimensions			*Weight (wet)	Typical fuel consumption (cruising 300 rpm below rated speed)			Rating	Emissions capability			
	kW	rpm	Litres			mm (ins)	mm (ins)	Length mm (ins)	Width mm (ins)	Height mm (ins)	kg (lbs)	UK gals/hr	Litres/hr	US gals/hr		RCD	EPA Tier 2	CCNR	IMO
M92B	64	2400	4.4	4	Natural	105 (4.1)	127 (5)	*823 (32.4)	688 (27)	853 (33.6)	423 (933)	2.5	11.5	3.0	MD	✓	✓ ¹	✓	NST
M130C	96	2600	6.0	6	Natural	100 (3.9)	127 (5)	*1081 (42.6)	653 (25.7)	801 (31.5)	595 (1312)	4.1	18.5	4.9	MD	—	—	—	NST
M135	99	2600	6.0	6	Natural	100 (3.9)	127 (5)	*1081 (42.6)	653 (25.7)	801 (31.5)	595 (1312)	4.1	18.5	4.9	MD	—	—	—	NST
M150Ti	112	2500	6.0	6	Wastegated Turbocharged, after cooled	100 (3.9)	127 (5)	*1081 (42.5)	735 (28.9)	803 (31.6)	609 (1343)	4.9	22.4	5.9	MD	✓	—	—	NST
M185	139	2100	6.0	6	Wastegated Turbocharged, after cooled	100 (3.9)	127 (5)	*1081 (42.5)	655 (25.8)	803 (31.6)	609 (1343)	4.8	22.0	5.8	HD	✓	—	—	IMO1
M190C	143	2100	6.6	6	Turbocharged, after cooled	105 (4.1)	127 (5)	*1159 (45.6)	835 (32.9)	838 (33)	736 (1623)	4.8	22.0	5.8	HD	✓	✓ ¹	✓	IMO2
M215C	155	2500	6.0	6	Wastegated Turbocharged, after cooled	100 (3.9)	127 (5)	*1081 (42.5)	655 (25.8)	803 (31.6)	609 (1343)	6.6	30.0	7.9	MD	✓	—	—	IMO1
M216C	161	2400	6.6	6	Turbocharged, after cooled	105 (4.1)	127 (5)	*1159 (45.6)	835 (32.9)	838 (33)	736 (1623)	5.8	26.5	7.0	MD	✓	✓ ¹	✓	IMO2
M225Ti	165.5	2500	6.0	6	Wastegated Turbocharged, after cooled	100 (3.9)	127 (5)	*1081 (42.5)	735 (28.9)	803 (31.6)	609 (1343)	6.6	30.0	7.9	MD	✓	—	—	IMO1
M250C	186	2400	6.6	6	Turbocharged, after cooled	105 (4.1)	127 (5)	*1159 (45.6)	763 (30)	841 (33.1)	738 (1627)	7.6	34.5	9.1	MD	✓	✓ ¹	✓	IMO2
M300C	225	2400	6.6	6	Turbocharged, after cooled	105 (4.1)	127 (5)	*1159 (45.6)	763 (30)	841 (33.1)	738 (1627)	9.5	43.0	11.4	MD	✓	✓ ¹	✓	IMO2

*Excludes transmission. ✓¹ Pleasure and Commercial


Marine Propulsion Engine Range



M92B
64 kW
4 Cylinder
Naturally aspirated

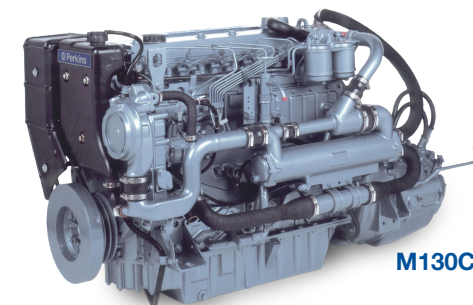


M130C/M135
96 kW
6 Cylinder
Naturally aspirated

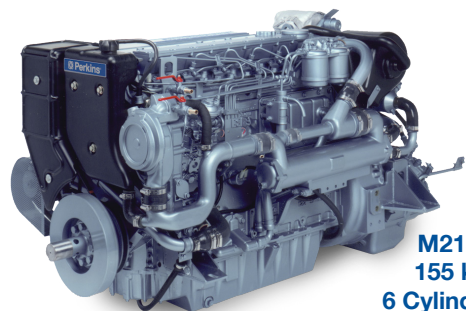


M215C
155 kW
6 Cylinder
Turbocharged, after cooled




M216C
161 kW
6 Cylinder
Turbocharged, after cooled

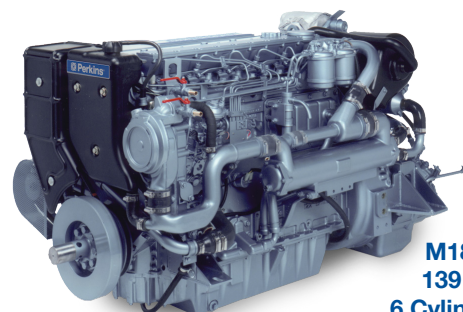

M185C
139 kW
6 Cylinder
Turbocharged, after cooled

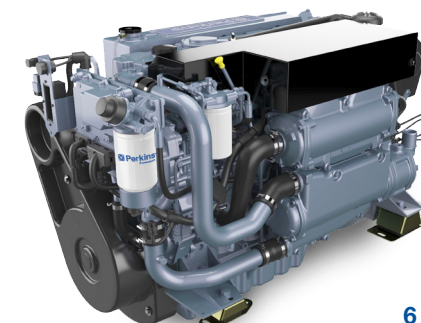


M190C
142 kW
6 Cylinder
Turbocharged, after cooled

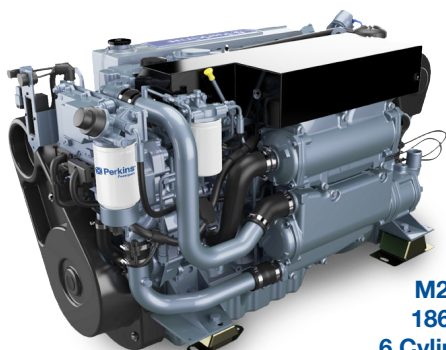

M250C
186 kW
6 Cylinder
Turbocharged, after cooled



M300C
225 kW
6 Cylinder
Turbocharged, after cooled

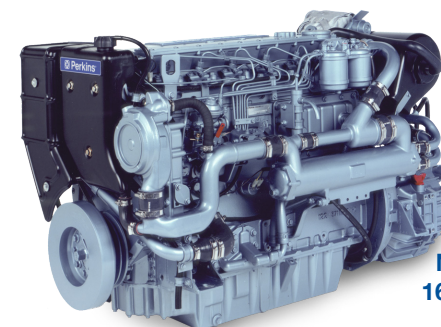

M225Ti/M150Ti
165.5 kW/112kW
6 Cylinder
Turbocharged, after cooled

 **Perkins®**

THE HEART OF EVERY GREAT MACHINE